


### STRAIGHT SOCKET JOINT (IPS)

Type SW (Standard Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
¾ (19)	07A-SW-10S	07C-SW-10S	Yes	1.050 (27)	+0.028 (0.7) -0.018 (0.4)	0.910 (23)	.070 (2)	10 ft (3m)	.17	(0.25)	
1 (25)	10A-SW-10S	10C-SW-10S	Yes	1.315 (33)	+0.028 (0.7) -0.018 (0.4)	1.175 (30)	.070 (2)	10 ft (3m)	.19	(0.28)	
1¼ (32)	12A-SW-20-S	12C-SW-20-S	Yes	1.660 (42)	+0.028 (0.7) -0.018 (0.4)	1.520 (39)	.070 (2)	20 ft (6.1m)	.23	(0.34)	
1½ (38)	15A-SW-20-S	15C-SW-20-S	Yes	1.900 (48)	+0.028 (0.7) -0.018 (0.4)	1.760 (45)	.070 (2)	20 ft (6.1m)	.33	(0.49)	

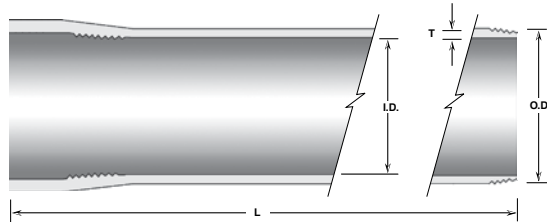

### INTERFERENCE JOINT (IPS)

Type SW (Standard Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
2 (51)	20A-SW-20-I	20C-SW-20-I	Yes	2.375 (60)	+0.028 (0.7) -0.018 (0.4)	2.235 (57)	.070 (2)	20 ft (6.1m)	.38	(0.57)	
2½ (64)	25A-SW-20-I	25C-SW-20-I	Yes	2.875 (73)	+0.028 (0.7) -0.018 (0.4)	2.740 (69)	.070 (2)	20 ft (6.1m)	.46	(0.68)	
3 (76)	30A-SW-20-I	30C-SW-20-I	Yes	3.500 (89)	+0.028 (0.7) -0.018 (0.4)	3.360 (85)	.070 (2)	20 ft (6.1m)	.60	(0.89)	
4 (102)	40A-SW-20-I	40C-SW-20-I	Yes	4.460 (113)	+0.028 (0.7) -0.018 (0.4)	4.320 (110)	.070 (2)	20 ft (6.1m)	.72	(1.07)	
5 (127)	50A-SW-20-I	50C-SW-20-I	--	5.520 (140)	+0.028 (0.7) -0.018 (0.4)	5.380 (137)	.070 (2)	20 ft (6.1m)	.90	(1.34)	
6 (152)	60A-SW-20-I	60C-SW-20-I	--	6.575 (167)	+0.028 (0.7) -0.018 (0.4)	6.435 (163)	.070 (2)	20 ft (6.1m)	1.00	(1.49)	
8 (203)	80A-SW-20-I	80C-SW-20-I	--	8.592 (218)	+0.028 (0.7) -0.018 (0.4)	8.400 (213)	.096 (2)	20 ft (6.1m)	2.02	(3.01)	

Type MW (Medium Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
5 (127)	50A-MW-20-I	50C-MW-20-I	Yes	5.572 (142)	+0.034 (0.9) -0.028 (0.7)	5.380 (137)	.096 (2)	20 ft (6.1m)	1.20	(1.79)	
6 (152)	60A-MW-20-I	60C-MW-20-I	Yes	6.627 (168)	+0.034 (0.9) -0.028 (0.7)	6.435 (163)	.096 (2)	20 ft (6.1m)	1.42	(2.11)	
8 (203)	80A-MW-20-I	80C-MW-20-I	--	8.620 (219)	+0.034 (0.9) -0.028 (0.7)	8.400 (213)	.110 (3)	20 ft (6.1m)	2.14	(3.20)	

Type HW (Heavy Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
4 (102)	40A-HW-20-I	40C-HW-20-I	Yes	4.512 (115)	+0.028 (0.7) -0.022 (0.6)	4.320 (110)	.096 (2)	20 ft (6.1m)	0.97	(1.44)	
5 (127)	50A-HW-20-I	50C-HW-20-I	Yes	5.600 (142)	+0.034 (0.9) -0.028 (0.7)	5.380 (137)	.110 (3)	20 ft (6.1m)	1.32	(1.96)	
6 (152)	60A-HW-20-I	60C-HW-20-I	Yes	6.655 (169)	+0.034 (0.9) -0.028 (0.7)	6.435 (163)	.110 (3)	20 ft (6.1m)	1.63	(2.43)	
8 (203)	80A-HW-20-I	80C-HW-20-I	--	8.650 (220)	+0.034 (0.9) -0.028 (0.7)	8.400 (213)	.125 (3)	20 ft (6.1m)	2.43	(3.62)	

\* Actual wall thickness is that required to meet the performance requirements for specifications. Other wall thicknesses are available by special request.

\*\* When ordering 10 ft (3.05m) lengths, half of the order will be supplied with interference joint and half with straight socket joint.