


### END BELLS-SOCKET TYPE

End bells are used for creating a permanent termination into a box as well as having a smooth surface that the cable can be pulled over.

Nominal Size	Type	IPS Item No.	D1	D2	L	M	Weight lbs	kg
¾	SW	07E-SW-29	1.06 (27)	1.20 (30)	1.60 (41)	1.50 (38)	0.10 (0.05)	
1	SW	10E-SW-29	1.32 (34)	1.46 (37)	1.60 (41)	1.80 (46)	0.10 (0.05)	
1¼	SW	12E-SW-29	1.67 (42)	1.81 (46)	1.60 (41)	2.20 (56)	0.15 (0.07)	
1½	SW	15E-SW-29	1.91 (49)	2.04 (52)	1.60 (41)	2.40 (61)	0.20 (0.09)	
2	SW	20E-SW-29	2.40 (61)	2.54 (61)	3.00 (76)	2.94 (75)	0.40 (0.18)	
3	SW	30E-SW-29	3.52 (89)	3.66 (93)	3.00 (76)	4.06 (103)	0.45 (0.20)	
4	SW	40E-SW-29	4.47 (114)	4.61 (117)	3.00 (76)	5.01 (127)	0.80 (0.36)	
4	HW	40E-HW-29	4.52 (115)	4.69 (119)	3.00 (76)	5.09 (129)	0.85 (0.38)	
5	MW	50E-MW-29	5.59 (142)	5.79 (147)	3.00 (76)	6.19 (157)	0.95 (0.43)	
5	HW	50E-HW-29	5.63 (143)	5.85 (149)	3.00 (76)	6.25 (159)	1.00 (0.45)	
6	MW	60E-MW-29	6.66 (169)	6.79 (172)	3.00 (76)	7.19 (183)	1.10 (0.50)	
6	HW	60E-HW-29	6.69 (170)	6.85 (174)	3.00 (76)	7.25 (184)	1.15 (0.52)	

Nominal Size	Type	ID Item No.	D1	D2	L	M	Weight lbs	kg
2	SW	20F-SW-29	2.16 (55)	2.30 (58)	3.00 (76)	2.70 (69)	0.40 (0.18)	
2½	SW	25F-SW-29	2.66 (68)	2.80 (71)	3.00 (76)	3.20 (81)	0.45 (0.20)	
3	SW	30F-SW-29	3.16 (80)	3.30 (84)	3.00 (76)	3.70 (94)	0.55 (0.25)	
3½	SW	35F-SW-29	3.66 (93)	3.80 (96)	3.00 (76)	4.20 (107)	0.60 (0.27)	
4	SW	40F-SW-29	4.16 (106)	4.30 (109)	3.00 (76)	4.70 (119)	0.78 (0.35)	
4	HW	40F-HW-29	4.20 (107)	4.39 (111)	3.00 (76)	4.79 (122)	0.95 (0.43)	
4½	SW	45F-SW-29	4.66 (118)	4.80 (122)	3.00 (76)	5.20 (132)	0.85 (0.38)	
4½	HW	45F-HW-29	4.70 (119)	4.89 (124)	3.00 (76)	5.29 (134)	0.90 (0.41)	
5	MW	50F-MW-29	5.20 (132)	5.39 (137)	3.00 (76)	5.79 (147)	0.85 (0.39)	
5	HW	50F-HW-29	5.24 (133)	5.42 (138)	3.00 (76)	5.82 (148)	0.87 (0.40)	
6	MW	60F-MW-29	6.20 (157)	6.39 (162)	3.00 (76)	6.79 (172)	1.15 (0.52)	
6	HW	60F-HW-29	6.24 (158)	6.42 (163)	3.00 (76)	6.82 (173)	1.25 (0.57)	

Nominal Size	Type	Item No.	D1	D2	L	M	Weight lbs	kg
¾	XW	07E-XW-29	1.44 (36)	1.935 (54)	1.60 (45)	2.48 (63)	0.63 (0.28)	
1	XW	10E-XW-29	1.70 (43)	2.200 (61)	1.60 (45)	2.70 (68)	0.70 (0.32)	
1¼	XW	12E-XW-29	2.05 (52)	2.545 (65)	1.60 (45)	3.11 (79)	0.85 (0.38)	
1½	XW	15E-XW-29	2.29 (58)	2.785 (71)	1.60 (45)	3.35 (85)	1.22 (0.55)	
2	XW	20F-XW-29	2.52 (64)	3.02 (76)	3.00 (76)	3.62 (92)	1.30 (0.59)	
2½	XW	25F-XW-29	3.03 (77)	3.525 (90)	3.00 (76)	4.22 (107)	1.59 (0.72)	
3	XW	30F-XW-29	3.52 (89)	4.02 (102)	3.00 (76)	4.62 (117)	1.90 (0.86)	
3½	XW	35F-XW-29	4.03 (102)	4.525 (115)	3.00 (76)	5.48 (139)	2.17 (0.98)	
4	XW	40F-XW-29	4.52 (115)	5.02 (128)	5.00 (127)	5.62 (143)	2.40 (1.09)	
5	XW	50F-XW-29	5.52 (140)	6.02 (153)	5.00 (127)	6.62 (168)	2.42 (1.10)	
6	XW	60F-XW-29	6.52 (166)	7.02 (178)	5.00 (127)	7.62 (194)	2.50 (1.13)	

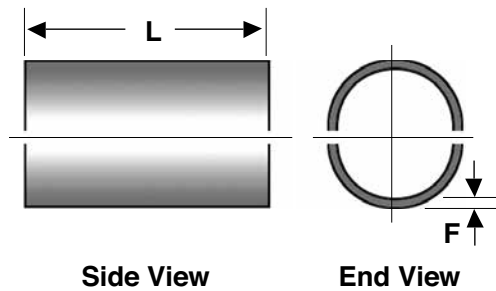

### SPLIT ANCHOR RINGS

Split anchor rings are supplied in pairs and are used to create fixed points. The split anchor rings are placed around the support system, close to the mid point between two expansion joints. One pair of split anchor rings is placed on each side of the support system. Split anchor rings are bonded to the outside of the conduit with FLAME SHIELD® Mix.

Nominal Size	Type	IPS Item No.	ID Item No.	F	L	Weight lbs	kg
¾	SW	07E-SW-28	—	0.25 (6)	3.0 (76)	0.18 (0.08)	
1	SW	10E-SW-28	—	0.25 (6)	3.0 (76)	0.21 (0.10)	
1¼	SW	12E-SW-28	—	0.25 (6)	3.0 (76)	0.26 (0.12)	
1½	SW	15E-SW-28	—	0.25 (6)	3.0 (76)	0.36 (0.16)	
2	SW	20E-SW-28	20F-SW-28	0.25 (6)	3.0 (76)	0.42 (0.19)	
2½	SW	25E-SW-28	25F-SW-28	0.25 (6)	3.0 (76)	0.48 (0.22)	
3	SW	30E-SW-28	30F-SW-28	0.25 (6)	3.0 (76)	0.67 (0.30)	
3½	SW	—	35F-SW-28	0.25 (6)	3.0 (76)	0.76 (0.34)	
4	SW	40E-SW-28	40F-SW-28	0.25 (6)	3.0 (76)	0.80 (0.36)	
4	HW	40E-HW-28	40F-HW-28	0.25 (6)	3.0 (76)	0.80 (0.36)	
4½	SW	—	45F-SW-28	0.25 (6)	3.0 (76)	0.91 (0.41)	
4½	HW	—	45F-HW-28	0.25 (6)	3.0 (76)	0.91 (0.41)	
5	MW	50E-MW-28	50F-MW-28	0.25 (6)	3.0 (76)	1.06 (0.48)	
5	HW	50E-HW-28	50F-HW-28	0.25 (6)	3.0 (76)	1.06 (0.48)	
6	MW	60E-MW-28	60F-MW-28	0.25 (6)	3.0 (76)	1.15 (0.52)	
6	HW	60E-HW-28	60F-HW-28	0.25 (6)	3.0 (76)	1.15 (0.52)	

Nominal Size	Type	Item No.	F	L	Weight lbs	kg
¾	XW	07E-XW-28	0.25 (6)	3 (76)	0.25 (0.11)	
1	XW	10E-XW-28	0.25 (6)	3 (76)	0.28 (0.13)	
1¼	XW	12E-XW-28	0.25 (6)	3 (76)	0.34 (0.15)	
1½	XW	15E-XW-28	0.25 (6)	3 (76)	0.49 (0.22)	
2	XW	20F-XW-28	0.25 (6)	3 (76)	0.52 (0.24)	
2½	XW	25F-XW-28	0.25 (6)	3 (76)	0.64 (0.29)	
3	XW	30F-XW-28	0.25 (6)	3 (76)	0.80 (0.36)	
3½	XW	35F-XW-28	0.25 (6)	3 (76)	0.87 (0.39)	
4	XW	40F-XW-28	0.25 (6)	3 (76)	0.98 (0.44)	
5	XW	50F-XW-28	0.25 (6)	3 (76)	1.15 (0.52)	
6	XW	60F-XW-28	0.25 (6)	3 (76)	1.25 (0.57)	