


REDUCING ADAPTER

Transition adapter from ID/tubular fiberglass conduit to IPS type and PVC schedule 40 and 80.

Nominal Size	Type	Item No.		D1	D2	L	Weight	
		Belowground	Aboveground				lbs	kg
2	SW	20B-SW-27	20D-SW-27	2.16 (55)	2.40 (61)	6 (152)	0.30 (0.14)	
3	SW	30B-SW-27	30D-SW-27	3.16 (80)	3.52 (89)	6 (152)	0.50 (0.23)	
4	SW	40B-SW-27	40D-SW-27	4.16 (106)	4.47 (114)	6 (152)	0.60 (0.27)	
4	HW	40B-HW-27	40D-HW-27	4.20 (107)	4.52 (115)	6 (152)	0.70 (0.32)	
5	SW	50B-SW-27	50D-SW-27	5.16 (131)	5.54 (141)	6 (152)	0.70 (0.32)	
5	MW	50B-MW-27	50D-MW-27	5.20 (132)	5.59 (142)	6 (152)	0.90 (0.41)	
5	HW	50B-HW-27	50D-HW-27	5.24 (133)	5.63 (143)	6 (152)	1.00 (0.45)	
6	SW	60B-SW-27	60D-SW-27	6.16 (156)	6.61 (168)	6 (152)	0.80 (0.36)	
6	MW	60B-MW-27	60D-MW-27	6.20 (157)	6.66 (169)	6 (152)	1.10 (0.50)	
6	HW	60B-HW-27	60D-HW-27	6.24 (158)	6.69 (170)	6 (152)	1.20 (0.55)	




REDUCING ADAPTER

This adapter is used for transition between different diameters of fiberglass conduit.

Nominal Size	IPS Item No.	Belowground	Aboveground	D1	D2	L	Weight	
							lbs	kg
¾ SW - ½ SW	07A-SW-25-05A	07C-SW-25-05C	0.87 (22)	1.06 (27)	4 (101)	0.30 (0.14)		
1 SW - ½ SW	10A-SW-25-05A	10C-SW-25-05C	0.87 (22)	1.32 (34)	4 (101)	0.40 (0.18)		
1 SW - ¾ SW	10A-SW-25-07A	10C-SW-25-07C	1.06 (27)	1.32 (34)	4 (101)	0.35 (0.16)		
1¼ SW - ¾ SW	12A-SW-25-07A	12C-SW-25-07C	1.06 (27)	1.67 (42)	4 (101)	0.45 (0.20)		
1¼ SW - 1 SW	12A-SW-25-10A	12C-SW-25-10C	1.32 (34)	1.67 (42)	4 (101)	0.40 (0.18)		
1½ SW - ¾ SW	15A-SW-25-07A	15C-SW-25-07C	1.06 (27)	1.91 (48)	4 (101)	0.38 (0.17)		
1½ SW - 1 SW	15A-SW-25-10A	15C-SW-25-10C	1.32 (34)	1.91 (48)	4 (101)	0.40 (0.18)		
1½ SW - 1¼ SW	15A-SW-25-12A	15C-SW-25-12C	1.67 (42)	1.91 (48)	6 (152)	0.37 (0.17)		
2 SW - ¾ SW	20A-SW-25-07A	20C-SW-25-07C	1.06 (27)	2.40 (61)	6 (152)	0.60 (0.27)		
2 SW - 1 SW	20A-SW-25-10A	20C-SW-25-10C	1.32 (34)	2.40 (61)	6 (152)	0.55 (0.25)		
2 SW - 1¼ SW	20A-SW-25-12A	20C-SW-25-12C	1.67 (42)	2.40 (61)	6 (152)	0.50 (0.23)		
2 SW - 1½ SW	20A-SW-25-15A	20C-SW-25-15C	1.91 (48)	2.40 (61)	6 (152)	0.47 (0.21)		
3 SW - 2 SW	30A-SW-25-20A	30C-SW-25-20C	2.40 (61)	3.52 (89)	6 (152)	0.65 (0.32)		
4 SW - 2 SW	40A-SW-25-20A	40C-SW-25-20C	2.40 (61)	4.47 (113)	6 (152)	0.80 (0.36)		
4 SW - 3 SW	40A-SW-25-30A	40C-SW-25-30C	3.52 (89)	4.47 (113)	6 (152)	0.90 (0.41)		
5 SW - 3 SW	50A-SW-25-30A	50C-SW-25-30C	3.52 (89)	5.59 (142)	6 (152)	1.30 (0.59)		
5 SW - 4 SW	50A-SW-25-40A	50C-SW-25-40C	4.47 (114)	5.59 (142)	6 (152)	0.85 (0.39)		
6 SW - 4 SW	60A-SW-25-40A	60C-SW-25-40C	4.47 (114)	6.61 (166)	6 (152)	1.70 (0.77)		
6 MW - 5 SW	60A-MW-25-50A	60C-MW-25-50C	5.59 (142)	6.61 (166)	6 (152)	1.90 (0.86)		

Note: These are just examples of some reducing adapters. Contact Champion Fiberglass directly for other reducers.

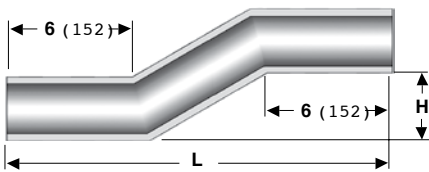


OFFSET BEND

When manufacturing offset bends, the vertical offset dimension, H, and the horizontal offset dimension, L, must be provided.

All offset bends are supplied with 6" (152mm) straight ends. (Item numbers for offset bends end with the suffix - 47.)

Contact your local sales representative or Champion Fiberglass for additional information.

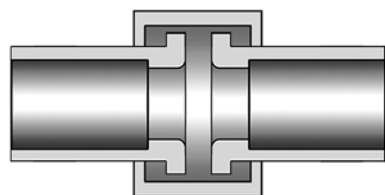

WOBBLE COUPLING

Wobble couplings are used for minor vertical and horizontal offsets for above ground installations. (Item numbers for wobble couplings end with the suffix - 48.)

For additional information regarding dimensions, etc., please contact your local sales representative or Champion Fiberglass directly.