


### END BELLS-SOCKET TYPE


End bells are used for creating a permanent termination into a box as well as having a smooth surface that the cable can be pulled over.

Nominal Size	Type	Item No.	D1	D2	L	M	Weight	
							lbs	kg
¾	XW	07C-XW-29	1.432 (36)	1.935 (54)	1.60 (45)	2.48 (63)	0.63	(0.28)
1	XW	10C-XW-29	1.700 (43)	2.200 (61)	1.60 (45)	2.70 (68)	0.70	(0.32)
1¼	XW	12C-XW-29	2.045 (52)	2.545 (65)	1.60 (45)	3.11 (79)	0.85	(0.38)
1½	XW	15C-XW-29	2.285 (58)	2.785 (71)	1.60 (45)	3.35 (85)	1.22	(0.55)
2	XW	20D-XW-29	2.520 (64)	3.020 (76)	3.00 (76)	3.62 (92)	1.30	(0.59)
2½	XW	25D-XW-29	3.025 (77)	3.525 (90)	3.00 (76)	4.22 (107)	1.59	(0.72)
3	XW	30D-XW-29	3.520 (89)	4.020 (102)	3.00 (76)	4.62 (117)	1.90	(0.86)
3½	XW	35D-XW-29	4.025 (102)	4.525 (115)	3.00 (76)	5.48 (139)	2.17	(0.98)
4	XW	40D-XW-29	4.520 (115)	5.020 (128)	5.00 (127)	5.62 (143)	2.40	(1.09)
5	XW	50D-XW-29	5.520 (140)	6.020 (153)	5.00 (127)	6.62 (168)	2.42	(1.10)
6	XW	60D-XW-29	6.520 (166)	7.020 (178)	5.00 (127)	7.62 (194)	2.50	(1.13)

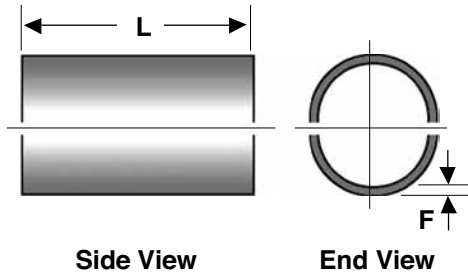

### SPLIT ANCHOR RINGS

Nominal Size	Type	Item No.	F	L	Weight	
					lbs	kg
¾	XW	07C-XW-28	0.25 (6)	3 (76)	0.25	(0.11)
1	XW	10C-XW-28	0.25 (6)	3 (76)	0.28	(0.13)
1¼	XW	12C-XW-28	0.25 (6)	3 (76)	0.34	(0.15)
1½	XW	15C-XW-28	0.25 (6)	3 (76)	0.49	(0.22)
2	XW	20D-XW-28	0.25 (6)	3 (76)	0.52	(0.24)
2½	XW	25D-XW-28	0.25 (6)	3 (76)	0.64	(0.29)
3	XW	30D-XW-28	0.25 (6)	3 (76)	0.80	(0.36)
3½	XW	35D-XW-28	0.25 (6)	3 (76)	0.87	(0.39)
4	XW	40D-XW-28	0.25 (6)	3 (76)	0.98	(0.44)
5	XW	50D-XW-28	0.25 (6)	3 (76)	1.15	(0.52)
6	XW	60D-XW-28	0.25 (6)	3 (76)	1.25	(0.57)



### THERMOPLASTIC PLUG

Nominal Size	Type	Item No.	Weight	
			lbs	kg
¾	XW	07C-XW-26	0.01	(0.005)
1	XW	10C-XW-26	0.01	(0.005)
1¼	XW	12C-XW-26	0.01	(0.005)
1½	XW	15C-XW-26	0.01	(0.005)
2	XW	20D-XW-26	0.01	(0.005)
2½	XW	25D-XW-26	0.01	(0.005)
3	XW	30D-XW-26	0.03	(0.014)
3½	XW	35D-XW-26	0.03	(0.014)
4	XW	40D-XW-26	0.03	(0.014)
5	XW	50D-XW-26	0.06	(0.027)
6	XW	60D-XW-26	0.07	(0.032)