


Conduit Straight Lengths

STRAIGHT SOCKET (XW)

CONDUIT STRAIGHT LENGTHS (XW)

	NOMINAL SIZE	XW ITEM NO		UL/CSA LISTED	TYPE XW (EXTRA HEAVY WALL) INCHES (METRIC)				MIN. INSIDE DIAMETER	NOMINAL WALL THICKNESS* (T)	LENGTH (L)		WEIGHT	
		BELOW GROUND	ABOVE GROUND		OUTSIDE DIAMETER		LBS/FT	KG/M						
					AVERAGE	TOLERANCE								
<input type="checkbox"/>	3/4" (19)	07A-XW-10S	07C-XW-10-S	Yes	1.410" (36)	+0.056" (1.4) -0.036" (0.9)	0.910" (23)	.25" (6)	10 ft (3 m)	0.61 (0.91)				
<input type="checkbox"/>	1" (25)	10A-XW-10S	10C-XW-10-S	Yes	1.675" (43)	+0.056" (1.4) -0.036" (0.9)	1.175" (30)	.25" (6)	10 ft (3 m)	0.68 (1.01)				
<input type="checkbox"/>	1-1/4" (32)	12A-XW-20-S	12C-XW-20-S	Yes	2.020" (51)	+0.056" (1.4) -0.036" (0.9)	1.520" (39)	.25" (6)	20 ft (6.1 m)	0.82 (1.22)				
<input type="checkbox"/>	1-1/2" (38)	15A-XW-20-S	15C-XW-20-S	Yes	2.260" (57)	+0.056" (1.4) -0.036" (0.9)	1.760" (45)	.25" (6)	20 ft (6.1 m)	1.18 (1.76)				
<input type="checkbox"/>	2" (51)	20B-XW-20-S	20D-XW-20-S	Yes	2.500" (64)	+0.056" (1.4) -0.036" (0.9)	2.000" (51)	.25" (6)	20 ft (6.1 m)	1.26 (1.88)				
<input type="checkbox"/>	2-1/2" (64)	25B-XW-20-S	25D-XW-20-S	Yes	3.000" (76)	+0.056" (1.4) -0.036" (0.9)	2.500" (64)	.25" (6)	20 ft (6.1 m)	1.54 (2.29)				
<input type="checkbox"/>	3" (76)	30B-XW-20-S	30D-XW-20-S	Yes	3.500" (89)	+0.056" (1.4) -0.036" (0.9)	3.000" (76)	.25" (6)	20 ft (6.1 m)	1.82 (2.71)				
<input type="checkbox"/>	3-1/2" (89)	35B-XW-20-S	35D-XW-20-S	Yes	4.000" (102)	+0.056" (1.4) -0.036" (0.9)	3.500" (89)	.25" (6)	20 ft (6.1 m)	2.10 (3.13)				
<input type="checkbox"/>	4" (102)	40B-XW-20-S	40D-XW-20-S	Yes	4.500" (114)	+0.056" (1.4) -0.036" (0.9)	4.000" (102)	.25" (6)	20 ft (6.1 m)	2.38 (3.54)				
<input type="checkbox"/>	5" (127)	50B-XW-20-S	50D-XW-20-S	Yes	5.500" (140)	+0.056" (1.4) -0.036" (0.9)	5.000" (127)	.25" (6)	20 ft (6.1 m)	2.94 (4.38)				
<input type="checkbox"/>	6" (152)	60B-XW-20-S	60D-XW-20-S	Yes	6.500" (165)	+0.056" (1.4) -0.036" (0.9)	6.000" (152)	.25" (6)	20 ft (6.1 m)	3.50 (5.21)				
<input type="checkbox"/>	8" (203)	80A-XW-20-S	80C-XW-20-S	-	8.900" (226)	+0.056" (1.4) -0.036" (0.9)	8.400" (213)	.25" (6)	20 ft (6.1 m)	4.80 (7.14)				
<input type="checkbox"/>	10" (254)	100B-XW-20-S	100D-XW-20-S	-	10.500" (267)	+0.056" (1.4) -0.036" (0.9)	10.000" (254)	.25" (6)	20 ft (6.1 m)	5.74 (8.54)				
<input type="checkbox"/>	12" (305)	120B-XW-20-S	120D-XW-20-S	-	12.500" (318)	+0.056" (1.4) -0.036" (0.9)	12.000" (305)	.25" (6)	20 ft (6.1 m)	6.86 (10.21)				

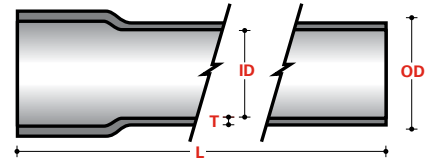

* Actual wall thickness is that required to meet the performance requirements for specifications. Other wall thicknesses are available by special request.