


### STRAIGHT SOCKET JOINT (IPS)

Type SW (Standard Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
¾ (19)	07A-SW-10S	07C-SW-10S	Yes	1.050 (27)	+0.028 (0.7) -0.018 (0.4)	0.910 (23)	.070 (2)	10 ft (3m)	.17 (0.25)		
1 (25)	10A-SW-10S	10C-SW-10S	Yes	1.315 (33)	+0.028 (0.7) -0.018 (0.4)	1.175 (30)	.070 (2)	10 ft (3m)	.19 (0.28)		
1¼ (32)	12A-SW-20-S	12C-SW-20-S	Yes	1.660 (42)	+0.028 (0.7) -0.018 (0.4)	1.520 (39)	.070 (2)	20 ft (6.1m)	.23 (0.34)		
1½ (38)	15A-SW-20-S	15C-SW-20-S	Yes	1.900 (48)	+0.028 (0.7) -0.018 (0.4)	1.760 (45)	.070 (2)	20 ft (6.1m)	.33 (0.49)		

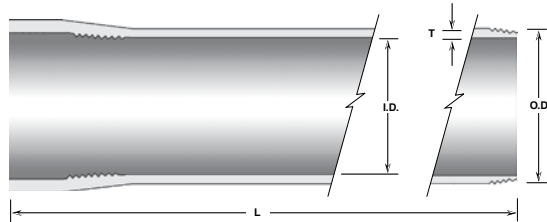

### INTERFERENCE JOINT (IPS)


Type SW (Standard Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
2 (51)	20A-SW-20-I	20C-SW-20-I	Yes	2.375 (60)	+0.028 (0.7) -0.018 (0.4)	2.235 (57)	.070 (2)	20 ft (6.1m)	.38 (0.57)		
2½ (64)	25A-SW-20-I	25C-SW-20-I	Yes	2.875 (73)	+0.028 (0.7) -0.018 (0.4)	2.740 (69)	.070 (2)	20 ft (6.1m)	.46 (0.68)		
3 (76)	30A-SW-20-I	30C-SW-20-I	Yes	3.500 (89)	+0.028 (0.7) -0.018 (0.4)	3.360 (85)	.070 (2)	20 ft (6.1m)	.60 (0.89)		
4 (102)	40A-SW-20-I	40C-SW-20-I	Yes	4.460 (113)	+0.028 (0.7) -0.018 (0.4)	4.320 (110)	.070 (2)	20 ft (6.1m)	.72 (1.07)		
5 (127)	50A-SW-20-I	50C-SW-20-I	--	5.520 (140)	+0.028 (0.7) -0.018 (0.4)	5.380 (137)	.070 (2)	20 ft (6.1m)	.90 (1.34)		
6 (152)	60A-SW-20-I	60C-SW-20-I	--	6.575 (167)	+0.028 (0.7) -0.018 (0.4)	6.435 (163)	.070 (2)	20 ft (6.1m)	1.00 (1.49)		
8 (203)	80A-SW-20-I	80C-SW-20-I	--	8.592 (218)	+0.028 (0.7) -0.018 (0.4)	8.400 (213)	.096 (2)	20 ft (6.1m)	2.02 (3.01)		

Type MW (Medium Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
5 (127)	50A-MW-20-I	50C-MW-20-I	Yes	5.572 (142)	+0.034 (0.9) -0.028 (0.7)	5.380 (137)	.096 (2)	20 ft (6.1m)	1.20 (1.79)		
6 (152)	60A-MW-20-I	60C-MW-20-I	Yes	6.627 (168)	+0.034 (0.9) -0.028 (0.7)	6.435 (163)	.096 (2)	20 ft (6.1m)	1.42 (2.11)		
8 (203)	80A-MW-20-I	80C-MW-20-I	--	8.620 (219)	+0.034 (0.9) -0.028 (0.7)	8.400 (213)	.110 (3)	20 ft (6.1m)	2.14 (3.20)		

Type HW (Heavy Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
4 (102)	40A-HW-20-I	40C-HW-20-I	Yes	4.512 (115)	+0.028 (0.7) -0.022 (0.6)	4.320 (110)	.096 (2)	20 ft (6.1m)	0.97 (1.44)		
5 (127)	50A-HW-20-I	50C-HW-20-I	Yes	5.600 (142)	+0.034 (0.9) -0.028 (0.7)	5.380 (137)	.110 (3)	20 ft (6.1m)	1.32 (1.96)		
6 (152)	60A-HW-20-I	60C-HW-20-I	Yes	6.655 (169)	+0.034 (0.9) -0.028 (0.7)	6.435 (163)	.110 (3)	20 ft (6.1m)	1.63 (2.43)		
8 (203)	80A-HW-20-I	80C-HW-20-I	--	8.650 (220)	+0.034 (0.9) -0.028 (0.7)	8.400 (213)	.125 (3)	20 ft (6.1m)	2.43 (3.62)		

\* Actual wall thickness is that required to meet the performance requirements for specifications. Other wall thicknesses are available by special request.

\*\* When ordering 10 ft (3.05m) lengths, half of the order will be supplied with interference joint and half with straight socket joint.

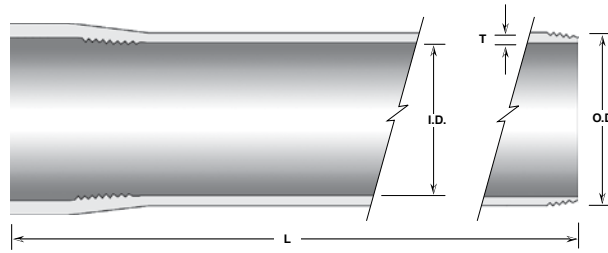


### INTERFERENCE JOINT (ID)

Type SW (Standard Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
2 (51)	20B-SW-20-I	20D-SW-20-I	Yes	2.140 (54)	+0.028 (0.7) -0.018 (0.4)	2.000 (51)	.070 (2)	20 ft (6.1m)	0.34	(0.51)	
2½ (64)	25B-SW-20-I	25D-SW-20-I	Yes	2.640 (67)	+0.028 (0.7) -0.018 (0.4)	2.500 (64)	.070 (2)	20 ft (6.1m)	0.42	(0.63)	
3 (76)	30B-SW-20-I	30D-SW-20-I	Yes	3.140 (80)	+0.028 (0.7) -0.018 (0.4)	3.000 (76)	.070 (2)	20 ft (6.1m)	0.48	(0.72)	
3½ (89)	35B-SW-20-I	35D-SW-20-I	Yes	3.640 (92)	+0.028 (0.7) -0.018 (0.4)	3.500 (89)	.070 (2)	20 ft (6.1m)	0.60	(0.89)	
4 (102)	40B-SW-20-I	40D-SW-20-I	Yes	4.140 (105)	+0.028 (0.7) -0.018 (0.4)	4.000 (101)	.070 (2)	20 ft (6.1m)	0.69	(1.03)	
4½ (114)	45B-SW-20-I	45D-SW-20-I	--	4.640 (118)	+0.028 (0.7) -0.018 (0.4)	4.500 (114)	.070 (2)	20 ft (6.1m)	0.75	(1.12)	
5 (127)	50B-SW-20-I	50D-SW-20-I	--	5.140 (131)	+0.028 (0.7) -0.018 (0.4)	5.000 (127)	.070 (2)	20 ft (6.1m)	0.85	(1.27)	
6 (152)	60B-SW-20-I	60D-SW-20-I	--	6.140 (156)	+0.028 (0.7) -0.018 (0.4)	6.000 (152)	.070 (2)	20 ft (6.1m)	1.02	(1.52)	
8 (203)	80B-SW-20-S	80D-SW-20-S	--	8.192 (208)	+0.028 (0.7) -0.018 (0.4)	8.000 (203)	.096 (2)	20 ft (6.1m)	1.86	(2.77)	
10 (254)	100B-SW-20-S	100D-SW-20-S	--	10.250 (260)	+0.028 (0.7) -0.018 (0.4)	10.000 (254)	.125 (3)	20 ft (6.1m)	3.04	(4.52)	
12 (305)	120B-SW-20-S	120D-SW-20-S	--	12.250 (311)	+0.028 (0.7) -0.018 (0.4)	12.000 (305)	.125 (3)	20 ft (6.1m)	3.64	(5.42)	

Type MW (Medium Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
5 (127)	50B-MW-20-I	50D-MW-20-I	Yes	5.192 (131)	+0.034 (0.9) -0.028 (0.7)	5.000 (127)	.096 (2)	20 ft (6.1m)	1.13	(1.68)	
6 (152)	60B-MW-20-I	60D-MW-20-I	Yes	6.192 (157)	+0.034 (0.9) -0.028 (0.7)	6.000 (152)	.096 (2)	20 ft (6.1m)	1.35	(2.01)	
8 (203)	80B-MW-20-S	80D-MW-20-S	--	8.220 (209)	+0.028 (0.7) -0.018 (0.4)	8.000 (203)	.110 (3)	20 ft (6.1m)	2.13	(3.17)	
10 (254)	100B-MW-20-S	100D-MW-20-S	--	10.312 (262)	+0.034 (0.9) -0.028 (0.7)	10.000 (254)	.156 (4)	20 ft (6.1m)	3.65	(5.43)	
12 (305)	120B-MW-20-S	120D-MW-20-S	--	12.312 (313)	+0.034 (0.9) -0.028 (0.7)	12.000 (305)	.156 (4)	20 ft (6.1m)	4.37	(6.50)	


Type HW (Heavy Wall) Inches (Metric)											
Nominal Size	Item No		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight		
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m	
4 (102)	40B-HW-20-I	40D-HW-20-I	Yes	4.192 (106)	+0.028 (0.7) -0.022 (0.6)	4.000 (101)	.096 (2)	20 ft (6.1m)	0.92	(1.37)	
4½ (114)	45B-HW-20-I	45D-HW-20-I	Yes	4.692 (119)	+0.028 (0.7) -0.022 (0.6)	4.500 (114)	.096 (2)	20 ft (6.1m)	1.04	(1.55)	
5 (127)	50B-HW-20-I	50D-HW-20-I	Yes	5.220 (132)	+0.034 (0.9) -0.028 (0.7)	5.000 (127)	.110 (3)	20 ft (6.1m)	1.30	(1.92)	
6 (152)	60B-HW-20-I	60D-HW-20-I	Yes	6.220 (158)	+0.034 (0.9) -0.028 (0.7)	6.000 (152)	.110 (3)	20 ft (6.1m)	1.58	(2.35)	
8 (203)	80B-HW-20-S	80D-HW-20-S	--	8.250 (210)	+0.028 (0.7) -0.018 (0.4)	8.000 (203)	.125 (3)	20 ft (6.1m)	2.42	(3.60)	
10 (254)	100B-HW-20-S	100D-HW-20-S	--	10.376 (264)	+0.034 (0.9) -0.028 (0.7)	10.000 (254)	.188 (5)	20 ft (6.1m)	4.50	(6.70)	
12 (305)	120B-HW-20-S	120D-HW-20-S	--	12.376 (314)	+0.034 (0.9) -0.028 (0.7)	12.000 (305)	.188 (5)	20 ft (6.1m)	5.38	(8.01)	

\* Actual wall thickness is that required to meet the performance requirements for specifications. Other wall thicknesses are available by special request.

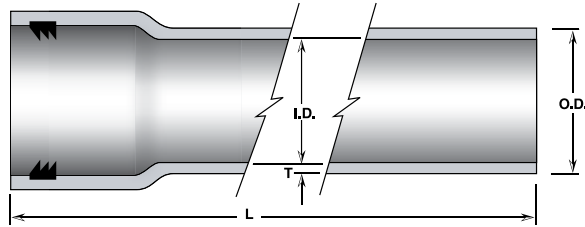

**STRAIGHT GASKET JOINT (IPS)**

Type SW (Standard Wall) Inches (Metric)										
Nominal Size	Item No.		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight	
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m
¾ (19)	07A-SW-10-G	07C-SW-10-G	Yes	1.050 (27)	+0.028 (0.7) -0.018 (0.4)	0.910 (23)	.070 (2)	10 ft (3m)	.17 (0.25)	
1 (25)	10A-SW-10-G	10C-SW-10-G	Yes	1.315 (33)	+0.028 (0.7) -0.018 (0.4)	1.175 (30)	.070 (2)	10 ft (3m)	.19 (0.28)	
1¼ (32)	12A-SW-20-G	12C-SW-20-G	Yes	1.660 (42)	+0.028 (0.7) -0.018 (0.4)	1.520 (39)	.070 (2)	20 ft (6.1m)	.23 (0.34)	
1½ (38)	15A-SW-20-G	15C-SW-20-G	Yes	1.900 (48)	+0.028 (0.7) -0.018 (0.4)	1.760 (45)	.070 (2)	20 ft (6.1m)	.33 (0.49)	

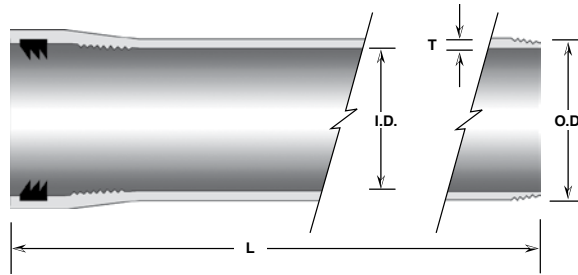

**INTERFERENCE GASKET JOINT (IPS)**


Type SW (Standard Wall) Inches (Metric)										
Nominal Size	Item No.		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight	
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m
2 (51)	20A-SW-20-G	20C-SW-20-G	Yes	2.375 (60)	+0.028 (0.7) -0.018 (0.4)	2.235 (57)	.070 (2)	20 ft (6.1m)	0.38 (0.57)	
3 (76)	30A-SW-20-G	30C-SW-20-G	Yes	3.500 (89)	+0.028 (0.7) -0.018 (0.4)	3.360 (85)	.070 (2)	20 ft (6.1m)	0.60 (0.90)	
4 (102)	40A-SW-20-G	40C-SW-20-G	Yes	4.460 (113)	+0.028 (0.7) -0.018 (0.4)	4.320 (110)	.070 (2)	20 ft (6.1m)	0.72 (1.07)	
5 (127)	50A-SW-20-G	50C-SW-20-G	--	5.520 (140)	+0.028 (0.7) -0.018 (0.4)	5.380 (137)	.070 (2)	20 ft (6.1m)	0.90 (1.34)	
6 (152)	60A-SW-20-G	60C-SW-20-G	--	6.575 (167)	+0.028 (0.7) -0.018 (0.4)	6.435 (163)	.070 (2)	20 ft (6.1m)	1.00 (1.49)	
8 (203)	80A-SW-20-G	80C-SW-20-G	--	8.592 (218)	+0.028 (0.7) -0.018 (0.4)	8.400 (213)	.096 (2)	20 ft (6.1m)	2.02 (3.01)	

Type MW (Medium Wall) Inches (Metric)										
Nominal Size	Item No.		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight	
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m
5 (127)	50A-MW-20-G	50C-MW-20-G	Yes	5.572 (142)	+0.034 (0.9) -0.028 (0.7)	5.380 (137)	.096 (2)	20 ft (6.1m)	1.20 (1.79)	
6 (152)	60A-MW-20-G	60C-MW-20-G	Yes	6.627 (168)	+0.034 (0.9) -0.028 (0.7)	6.435 (163)	.096 (2)	20 ft (6.1m)	1.42 (2.11)	
8 (203)	80A-MW-20-G	80C-MW-20-G	--	8.620 (219)	+0.028 (0.7) -0.018 (0.4)	8.400 (213)	.110 (3)	20 ft (6.1m)	2.14 (3.20)	

Type HW (Heavy Wall) Inches (Metric)										
Nominal Size	Item No.		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight	
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m
4 (102)	40A-HW-20-G	40C-HW-20-G	Yes	4.512 (115)	+0.028 (0.7) -0.022 (0.6)	4.320 (110)	.096 (2)	20 ft (6.1m)	0.97 (1.44)	
5 (127)	50A-HW-20-G	50C-HW-20-G	Yes	5.600 (142)	+0.034 (0.9) -0.028 (0.7)	5.380 (137)	.110 (3)	20 ft (6.1m)	1.32 (1.96)	
6 (152)	60A-HW-20-G	60C-HW-20-G	Yes	6.655 (169)	+0.034 (0.9) -0.028 (0.7)	6.435 (163)	.110 (3)	20 ft (6.1m)	1.63 (2.43)	
8 (203)	80A-HW-20-G	80C-HW-20-G	--	8.650 (220)	+0.028 (0.7) -0.018 (0.4)	8.400 (213)	.125 (3)	20 ft (6.1m)	2.43 (3.62)	

\* Actual wall thickness is that required to meet the performance requirements for specifications. Other wall thicknesses are available by special request.

\*\* When ordering 10 ft (3.05m) lengths, half of the order will be supplied with interference joint and half with straight socket joint.

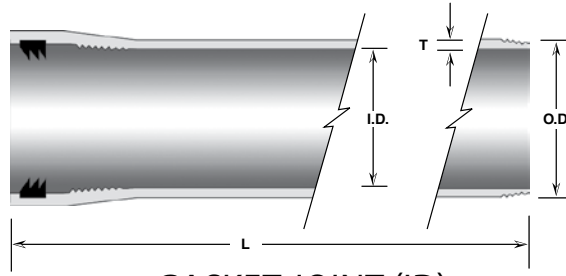

GASKET JOINT (ID)

Type SW (Standard Wall) Inches (Metric)										
Nominal Size	Item No.		UL/CSA Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight	
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m
2 (51)	20B-SW-20-G	20D-SW-20-G	Yes	2.140 (54)	+0.028 (0.7) -0.018 (0.4)	2.000 (51)	.070 (2)	20 ft (6.1m)	0.34 (0.51)	
2½ (64)	25B-SW-20-G	25D-SW-20-G	Yes	2.640 (67)	+0.028 (0.7) -0.018 (0.4)	2.500 (64)	.070 (2)	20 ft (6.1m)	0.42 (0.63)	
3 (76)	30B-SW-20-G	30D-SW-20-G	Yes	3.140 (80)	+0.028 (0.7) -0.018 (0.4)	3.000 (76)	.070 (2)	20 ft (6.1m)	0.48 (0.71)	
3½ (89)	35B-SW-20-G	35D-SW-20-G	Yes	3.640 (92)	+0.028 (0.7) -0.018 (0.4)	3.500 (89)	.070 (2)	20 ft (6.1m)	0.60 (0.89)	
4 (102)	40B-SW-20-G	40D-SW-20-G	Yes	4.140 (105)	+0.028 (0.7) -0.018 (0.4)	4.000 (101)	.070 (2)	20 ft (6.1m)	0.79 (1.18)	
4½ (114)	45B-SW-20-G	45D-SW-20-G	Yes	4.640 (118)	+0.028 (0.7) -0.018 (0.4)	4.500 (114)	.070 (2)	20 ft (6.1m)	0.89 (1.32)	
5 (127)	50B-SW-20-G	50D-SW-20-G	--	5.140 (131)	+0.028 (0.7) -0.018 (0.4)	5.000 (127)	.070 (2)	20 ft (6.1m)	0.95 (1.41)	
6 (152)	60B-SW-20-G	60D-SW-20-G	--	6.140 (156)	+0.028 (0.7) -0.018 (0.4)	6.000 (152)	.070 (2)	20 ft (6.1m)	1.02 (1.52)	


  

Type MW (Medium Wall) Inches (Metric)										
5 (127)	50B-MW-20-G	50D-MW-20-G	Yes	5.192 (131)	+0.034 (0.9) -0.028 (0.7)	5.000 (127)	.096 (2)	20 ft (6.1m)	1.13 (1.68)	
6 (152)	60B-MW-20-G	60D-MW-20-G	Yes	6.192 (157)	+0.034 (0.9) -0.028 (0.7)	6.000 (152)	.096 (2)	20 ft (6.1m)	1.35 (2.01)	

Type HW (Heavy Wall) Inches (Metric)										
4 (102)	40B-HW-20-G	40D-HW-20-G	Yes	4.192 (106)	+0.028 (0.7) -0.022 (0.6)	4.000 (101)	.096 (2)	20 ft (6.1m)	0.92 (1.37)	
4½ (114)	45B-HW-20-G	45D-HW-20-G	Yes	4.692 (119)	+0.028 (0.7) -0.022 (0.6)	4.500 (114)	.096 (2)	20 ft (6.1m)	1.04 (1.55)	
5 (127)	50B-HW-20-G	50D-HW-20-G	Yes	5.220 (132)	+0.034 (0.9) -0.028 (0.7)	5.000 (127)	.110 (3)	20 ft (6.1m)	1.30 (1.92)	
6 (152)	60B-HW-20-G	60D-HW-20-G	Yes	6.220 (158)	+0.034 (0.9) -0.028 (0.7)	6.000 (152)	.110 (3)	20 ft (6.1m)	1.58 (2.35)	

\* Actual wall thickness is that required to meet the performance requirements for specifications. Other wall thicknesses are available by special request.

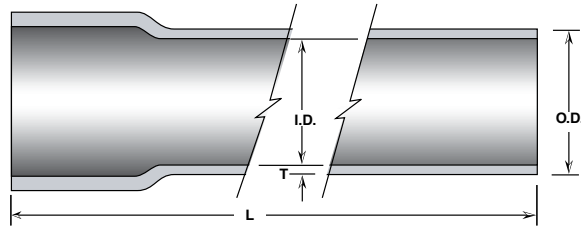

STRAIGHT SOCKET (XW)

Type XW (Xtra Wall) Inches (Metric)										
Nominal Size	Item No.		UL Listed	Outside Diameter		Min. Inside Diameter	Nominal Wall Thickness* (T)	Length (L)	Weight	
	Belowground	Aboveground		Average	Tolerance				lbs/ft	kg/m
¾ (19)	07A-XW-10S	07C-XW-10S	Yes	1.410 (36)	+0.056 (1.4) -0.036 (0.9)	0.910 (23)	.25 (6)	10 ft (3m)	.61 (.91)	
1 (25)	10A-XW-10S	10C-XW-10S	Yes	1.675 (43)	+0.056 (1.4) -0.036 (0.9)	1.175 (30)	.25 (6)	10 ft (3m)	.68 (1.01)	
1¼ (32)	12A-XW-20-S	12C-XW-20-S	Yes	2.020 (51)	+0.056 (1.4) -0.036 (0.9)	1.520 (39)	.25 (6)	20 ft (6.1m)	.82 (1.22)	
1½ (38)	15A-XW-20-S	15C-XW-20-S	Yes	2.260 (57)	+0.056 (1.4) -0.036 (0.9)	1.760 (45)	.25 (6)	20 ft (6.1m)	1.18 (1.76)	
2 (51)	20B-XW-20-S	20D-XW-20-S	Yes	2.500 (64)	+0.056 (1.4) -0.036 (0.9)	2.000 (51)	.25 (6)	20 ft (6.1m)	1.26 (1.88)	
2½ (64)	25B-XW-20-S	25D-XW-20-S	Yes	3.000 (76)	+0.056 (1.4) -0.036 (0.9)	2.500 (64)	.25 (6)	20 ft (6.1m)	1.54 (2.29)	
3 (76)	30B-XW-20-S	30D-XW-20-S	Yes	3.500 (89)	+0.056 (1.4) -0.036 (0.9)	3.000 (76)	.25 (6)	20 ft (6.1m)	1.82 (2.71)	
3½ (89)	35B-XW-20-S	35D-XW-20-S	Yes	4.000 (102)	+0.056 (1.4) -0.036 (0.9)	3.500 (89)	.25 (6)	20 ft (6.1m)	2.10 (3.13)	
4 (102)	40B-XW-20-S	40D-XW-20-S	Yes	4.500 (114)	+0.056 (1.4) -0.036 (0.9)	4.000 (102)	.25 (6)	20 ft (6.1m)	2.38 (3.54)	
5 (127)	50B-XW-20-S	50D-XW-20-S	Yes	5.500 (140)	+0.056 (1.4) -0.036 (0.9)	5.000 (127)	.25 (6)	20 ft (6.1m)	2.94 (4.38)	
6 (152)	60B-XW-20-S	60D-XW-20-S	Yes	6.500 (165)	+0.056 (1.4) -0.036 (0.9)	6.000 (152)	.25 (6)	20 ft (6.1m)	3.50 (5.21)	
8** (203)	80A-XW-20-S	80C-XW-20-S	--	8.900 (226)	+0.056 (1.4) -0.036 (0.9)	8.400 (213)	.25 (6)	20 ft (6.1m)	4.80 (7.14)	
10 (254)	100B-XW-20-S	100D-XW-20-S	--	10.500 (267)	+0.056 (1.4) -0.036 (0.9)	10.000 (254)	.25 (6)	20 ft (6.1m)	5.74 (8.54)	
12 (305)	120B-XW-20-S	120D-XW-20-S	--	12.500 (318)	+0.056 (1.4) -0.036 (0.9)	12.000 (305)	.25 (6)	20 ft (6.1m)	6.86 (10.21)	

\* Actual wall thickness is that required to meet the performance requirements for specifications. Other wall thicknesses are available by special request.

\*\* XW type conduit is also available with an inside diameter of 8.000 (203). Please contact our factory for further information.